

**KENNEDY VALVE KS-FW
RESILIENT
WEDGE VALVES**

KENNEDY VALVE

**KENNEDY VALVE AWWA C509 Resilient Wedge Gate Valves
Meet or Exceed the Requirements of
AWWA Standard C509
UL-262/FM-1120/1130
ULC-Underwriters' of Canada**

Size Range	Water Working Pressure psi	Seat Test psi	Hydrostatic Shell Test psi
AWWA 2"-12"	250 Water Works	250 & 400	500
ULFM 4"-12"	200 Fire Protection	250 & 400	500

Available in either non-rising stem or outside screw & yoke.

Available End Connections & Size Range	Figure No. (STD)	Figure No. with Post Plate
Flg. End (NRS) 2" - 12"	8561A	8701A (3" - 12")
M.J. 2" - 12" (except 2 1/2")	8571	8071 (3" - 12")
Flg. & M.J. 3" - 12"	8572	8702 (3" - 12")
Push-on for PVC (SDR) 2" - 8"	8597	8597P (3" - 8")
Flg. End (OS & Y) 2 1/2" - 12"	8068A	N/A
M.J. for Tapping 4" - 12"	8950	8950P
Push-on for D.I. & C900 PVC 4" - 12"	8901	8901P
M.J. Cutting-in 4" - 12"	8576	8576P
Push-on D.I. X Flg. 4" - 12"	8902	8902P
Threaded 2" - 3"	8057	8057P (3" only)
Threaded (OS&Y) 2" - 3"	8067	

Accessories

Indicator Posts	Handwheels
"T" Handles	Extension Stems
Stem Guides	Floor Boxes
2" Sq. Operating Nuts	Chain Wheels
Floorstands (non-rising stem)	EPDM Wedges Available
2" size not UL Listed	

LISTED





2" - 12" R/S VALVE FLANGE ENDS
OS&Y GENERAL DIMENSIONS

KENNEDY VALVE MODEL KS-FW

Complies with applicable requirements of AWWA C509

8068A

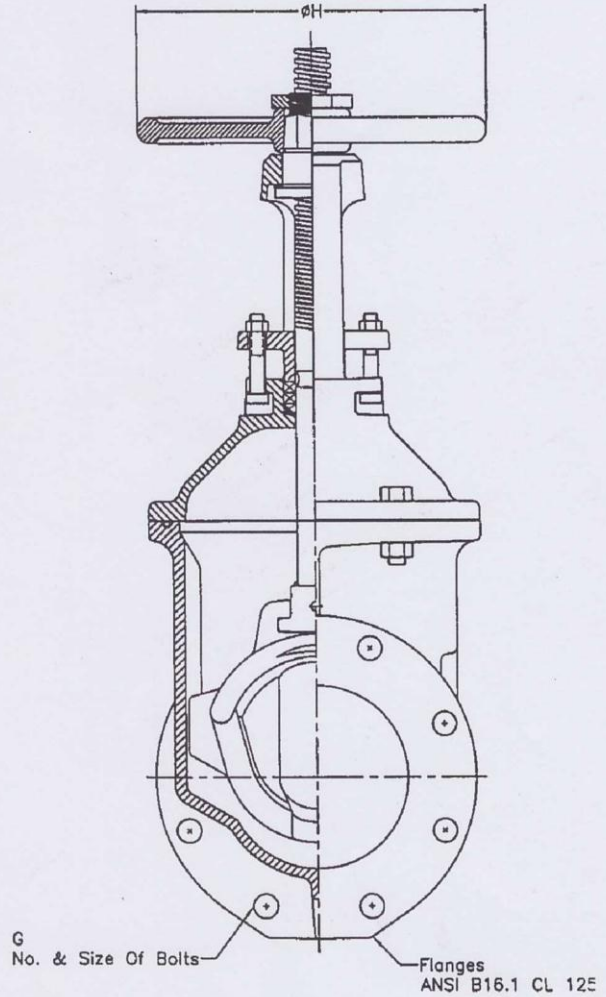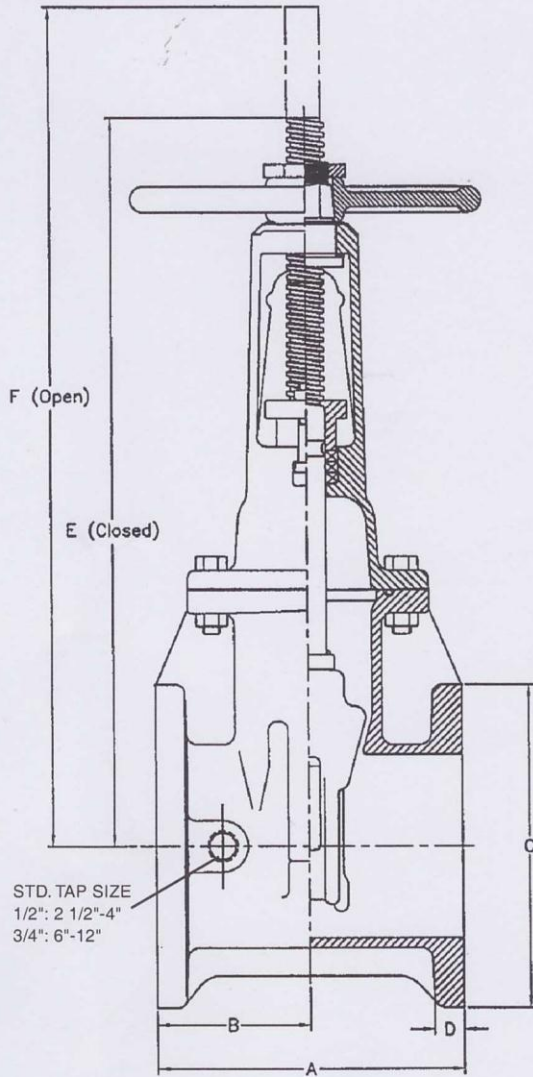

VALVE SIZE	A	B	C	D	E	F	G	H	WEIGHT
2	7	3 1/2	6	11/16	12	10	4 5/8	7 1/4	N/A
2 1/2	7 1/2	3 3/4	7	11/16	13 7/8	16 3/8	4 5/8	7 1/4	51
3	8	4	7 1/2	3/4	15 5/8	18 7/8	4 5/8	10	64
4	9	4 1/2	9	15/16	18 1/4	22 3/4	8 5/8	10	105
6	10 1/2	5 1/4	11	1	23 3/4	30 1/8	8 3/4	12	152
8	11 1/2	5 3/4	13 1/2	1 1/8	29 1/4	37 3/4	8 3/4	14	253
10	13	6 1/2	16	1 3/16	35 3/8	45 3/4	12 7/8	18	427
12	14	7	19	1 1/4	40 5/8	53 1/8	12 7/8	18	581

ALL FLANGE VALVES TAPPED & PLUGGED @ POSITION "A"